


## Dividers

Dividers are used for distributing the extinguishing medium from one feed line over several hose lines, or in special cases for collecting it in the reverse direction. Each hose line can be shut-off individually by means of a stop valve. The stop valve of the dividers must be according to DIN 14365 easily operated in the usual flow direction at 16 bar and in the opposite direction at 6 bar.

### Dividers with ball valves - 2 inlets, 3 outlets

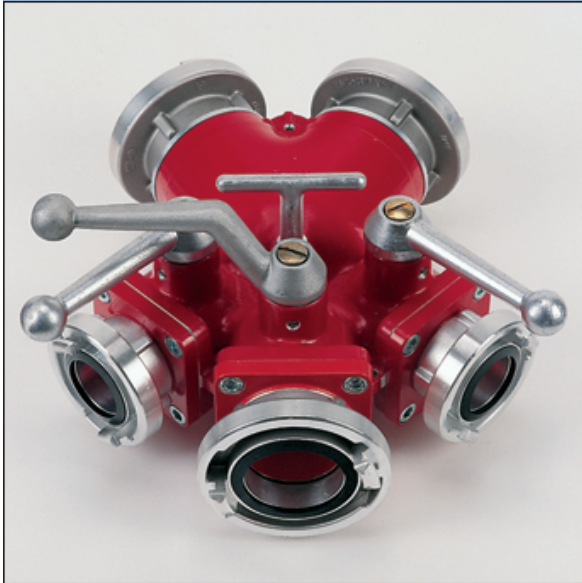

3202

With 3 outlets and 2 inlets.

They have a straight free-flow waterway, very low friction loss and easy and quick controllability.

**Storz System Connection or thread**

Inlet-Storz / thread	Outlet-Storz / thread	Balls ND (mm)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Ident-No.	Remarks
2 x 65	3 x 65	2 x 40 + 50	310	350	235	8,000	60491633	1)
2 x B	2 x C + B	2 x 40 + 50	310	350	235	8,080	60477033	1)
2 x 2½ A	2 x G2A + G2½ A	2 x 40 + 50	310	350	235	6,300	10066133	1)